


## Subminiature indicator

### Technical Drawing

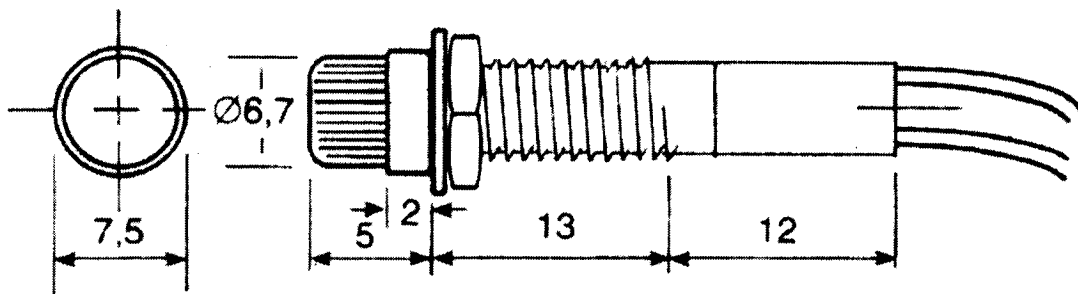

### Description

A range of subminiature panel mounting indicators available with neon or filament lamp indicators. The body is finished with a nickel plated brass bezel plus fixing nut and washer. Neon types incorporate a series resistor and are suitable for direct 200/250VAC operation. A useful indicator where panel space is a premium.

### Specification

Lead Length	:	150mm
Panel Cut-out	:	Ø ~ 6.4mm
Panel Thickness	:	0.5mm to 3.5mm
Maximum Temperature	:	120°C
Life expectancy 6v	:	20,000 hrs
14v	:	5,000 hrs

### Information

Voltage	Current	Colour
6V	40mA	Red
6V	40mA	Green
14V	40mA	Red
14V	40mA	Amber
14V	40mA	Green
250V	-	Red
250V	-	Amber
250V	-	Green